

EC (AC TO DC) FAN

172*150*51mm

RT17251 Series




DIMENSIONS DRAWING



全圆框也可生产 Round frame is available

外框材质:铝合金
Frame:Aluminum
扇叶材质:环保防火PBT
Impeller:Thermoplastic PBT UL94-V0
轴承结构:双滚珠
Bearing system:2Ball
单体风扇重量:720g
Unit Weight:720g

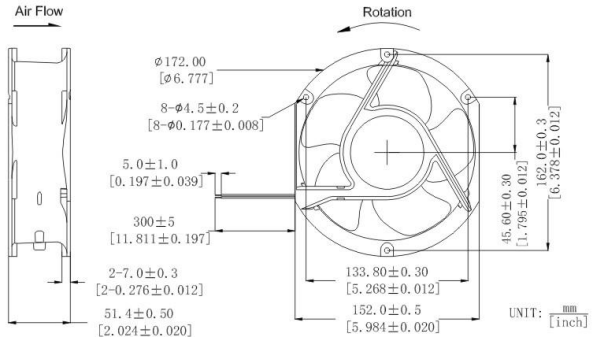

可选的功能参照列表 (Available Functions)

1. 马达保护 (Motor protection)



RP	SS	AS	CL
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

2. 信号输出 (Signal output)

FG	RD	RD	LD
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

3. 调速方式 (Speed control mode)

PWM	TP	VC	RC	CS
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

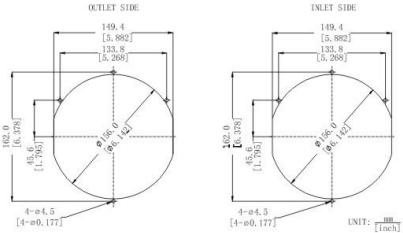

Part Number	Voltage(V)	Fre.(HZ)	Power(W)	Speed(RPM)	Air flow(Q)	Pressure(P)	Noise(dBA)
产品编号	电压范围	频率范围	功率	转速	(CFM) 风量	(Mmaq)风压	(In H ₂ O) 噪音
RT17251x11L	110(90~130)	45~65	13	2600	202.24	9.78	49.2
RT17251x11M		45~65	20	3500	269.65	7.63	56.9
RT17251x11H	220(150~230)	45~65	32	4200	322.10	24.79	61.7
RT17251x22L		45~65	13	2600	202.24	5.72	49.2
RT17251x22M		45~65	20	3500	269.65	7.63	56.9
RT17251x22H		45~65	32	4200	322.10	9.11	61.7

★ 如果您需要的转速或电压或功能不在这份清单上, 请与我们联系。
If you want another rpm or voltage or functions which one is not in the list, please contact with our sales.

★ 提示1: 功能的具体信息参照产品目录前页篇章。
Notes 1: The catalog have detail information in the front page for the functions.

★ 提示2: 产品详细信息请参照承认书。
Notes 2: Product have a detail in the approval sheet.

★ 提示3: 产品规格变更不另行通知。
Notes 3: Specifications are subject to change without notice.

★ 提示4: 该款机型可制作相同转速的, 可在AC110V和AC220V双电压下使用。
Notes 4: This model can be made in the same speed and used in AC110V, AC220V both.