

# EC (AC TO DC) FAN

## 60\*60\*38mm


### RT6038 Series



DIMENSIONS DRAWING



外框材质:环保防火PBT  
 Frame:Thermoplastic PBT UL94-V0  
 扇叶材质:环保防火PBT  
 Impeller:Thermoplastic PBT UL94-V0  
 轴承结构:双滚珠或长寿命含油结构  
 Bearing system:2Ball or Long life sleeve  
 单体风扇重量:106g  
 Unit Weight:106g

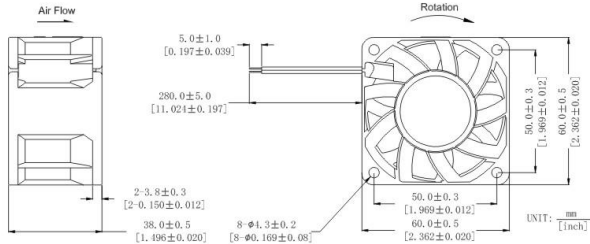

#### 可选的功能参照列表 (Available Functions)

##### 1. 马达保护 (Motor protection)

|                       |                       |                       |                       |
|-----------------------|-----------------------|-----------------------|-----------------------|
| RP                    | SS                    | AS                    | CL                    |
| <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |




##### 2. 信号输出 (Signal output)

|                       |                       |                       |                       |
|-----------------------|-----------------------|-----------------------|-----------------------|
| FG                    | RD                    | RD                    | LD                    |
| <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |

##### 3. 调速方式 (Speed control mode)

|                       |                       |                       |                       |                       |
|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| PWM                   | TP                    | VC                    | RC                    | CS                    |
| <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |

Fan Performance Curve

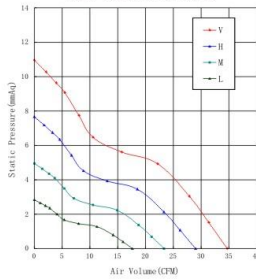

| Part Number | Voltage(V) | Fre. (HZ) | Power(W) | Speed(RPM) | Air flow(Q) | Pressure(P)         | Noise(dBA)                        |
|-------------|------------|-----------|----------|------------|-------------|---------------------|-----------------------------------|
| 产品编号        | 电压范围       | 频率范围      | 功率       | 转速         | (CFM) 风量    | m <sup>3</sup> /min | (Mmaq)风压 (In H <sub>2</sub> O) 噪音 |
| RT6038x12L  | 12(7~14)   | 45~65     | 3.0      | 3000       | 17.63       | 0.50                | 2.83 0.11 30.8                    |
| RT6038x12M  |            | 45~65     | 3.6      | 4000       | 23.32       | 0.66                | 4.95 0.19 36.9                    |
| RT6038x12H  |            | 45~65     | 4.4      | 5000       | 29.01       | 0.82                | 7.66 0.30 43.0                    |
| RT6038x12VH |            | 45~65     | 5.0      | 6000       | 34.70       | 0.98                | 10.96 0.43 47.4                   |
| RT6038x24L  | 24(15~27)  | 45~65     | 3.0      | 3000       | 17.63       | 0.50                | 2.83 0.11 30.8                    |
| RT6038x24M  |            | 45~65     | 3.6      | 4000       | 23.32       | 0.66                | 4.95 0.19 36.9                    |
| RT6038x24H  |            | 45~65     | 4.4      | 5000       | 29.01       | 0.82                | 7.66 0.30 43.0                    |
| RT6038x24VH |            | 45~65     | 5.0      | 6000       | 34.70       | 0.98                | 10.96 0.43 47.4                   |

- ★ 如果您需要的转速或电压或功能不在这份清单上, 请与我们联系。  
 If you want another rpm or voltage or functions which one is not in the list, please contact with our sales.
- ★ 提示1:功能的具体信息参照产品目录前页篇章。  
 Notes1: The catalog have detail information in the front page for the functions.
- ★ 提示2:产品详细信息请参照承认书。  
 Notes2: Product have a detail in the approval sheet.
- ★ 提示3:产品规格变更不另行通知。  
 Notes3: Specifications are subject to change without notice.
- ★ 提示4:该款机型可制作相同转速的, 可在AC110V和AC220V双电压下使用。  
 Note4: This model can be made in the same speed and used in AC110V, AC220V both.