# 40x20mm

## RB4020Series

NEW

DIMENSIONS DRAWING

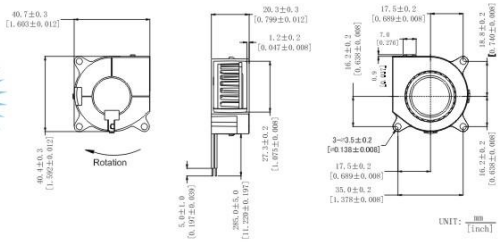


外框材质:环保防火PBT
Frame:Thermoplastic PBT UL94-V0
扇叶材质:环保防火PBT
Imperller:Thermoplastic PBT UL94-V0
轴承结构:双滚珠或长寿命含油结构
Bearing system:2Ball or Long life sleeve
单体风扇重量:26g
Unit Weight:26g

Fan Performance Curve




### 可选的功能参照列表 (Available Functions)

1.马达保护(Motor protection)

| RP | SS | AS | CL |
|---|---|---|---|
| ● | ● | ● | ● |

2.信号输出(Signal output)

| FG | RD | $\overline{RD}$ | LD |
|---|---|---|---|
| ● | ● | ● | ● |

3.调速方式(Speed control mode)

| PWM | TP | VC | RC | CS |
|---|---|---|---|---|
| ● | ● | ● | ● | ● |

| Part Number | Voltage(V) | Current(A) | Power(W) | Speed(RPM) | Air flow(Q) | | Pressure(P) | | Noise(dBA) |
|---|---|---|---|---|---|---|---|---|---|
| 产品编号 | 电压范围 | 额定电流 | 功率 | 转速 | (CFM)风量 | $m^3$/min | (mmAq)风压 | (In $H_2O$) | 噪音 |
| RB4020x05D | 5(4~6) | 0.10 | 0.50 | 4000 | 1.73 | 0.05 | 3.53 | 0.14 | 28.6 |
| RB4020x05L | | 0.15 | 0.75 | 5000 | 2.16 | 0.06 | 5.52 | 0.22 | 30.5 |
| RB4020x05M | | 0.20 | 1.00 | 6000 | 2.59 | 0.07 | 7.95 | 0.31 | 35.1 |
| RB4020x05H | | 0.28 | 1.40 | 7000 | 3.02 | 0.09 | 10.82 | 0.43 | 38.6 |
| RB4020x12D | 12(7~14) | 0.04 | 0.48 | 4000 | 1.73 | 0.05 | 3.53 | 0.14 | 28.6 |
| RB4020x12L | | 0.06 | 0.72 | 5000 | 2.16 | 0.06 | 5.52 | 0.22 | 30.5 |
| RB4020x12M | | 0.08 | 0.96 | 6000 | 2.59 | 0.07 | 7.95 | 0.31 | 35.1 |
| RB4020x12H | | 0.12 | 1.44 | 7000 | 3.02 | 0.09 | 10.82 | 0.43 | 38.6 |
| RB4020x12VH | | 0.17 | 2.04 | 8000 | 3.45 | 0.10 | 14.14 | 0.56 | 42.1 |
| RB4020x12SH | | 0.24 | 2.88 | 9000 | 3.88 | 0.11 | 17.89 | 0.70 | 45.7 |
| RB4020x24L | 24(15~27) | 0.04 | 0.96 | 5000 | 2.16 | 0.06 | 5.52 | 0.22 | 30.5 |
| RB4020x24M | | 0.05 | 1.20 | 6000 | 2.59 | 0.07 | 7.95 | 0.31 | 35.1 |
| RB4020x24H | | 0.06 | 1.44 | 7000 | 3.02 | 0.09 | 10.82 | 0.43 | 38.6 |
| RB4020x24VH | | 0.09 | 2.16 | 8000 | 3.45 | 0.10 | 14.14 | 0.56 | 42.1 |
| RB4020x24SH | | 0.12 | 2.88 | 9000 | 3.88 | 0.11 | 17.89 | 0.70 | 45.7 |

★ 如果您需要的转速或电压或功能不在这份清单上，请与我们业务联系。
If you want another rpm or voltage or functions which one is not in the list,please contact with our sales.

★ 提示1:功能的具体信息参照产品目录前页篇章。
Notes1:The catalog have detail information in the front page for the functions.

★ 提示2:产品详细信息请参照承认书。
Notes2:Product have a detail in the approval sheet.

★ 提示3:产品规格变更不另行通知。
Notes3:Specifications are subject to change without notice.

★ 提示4:调速方式只能制作12V机型。
Note4:Speed control mode only for 12V products.