


DC BLOWER

50x20mm

RB5020Series



DIMENSIONS DRAWING

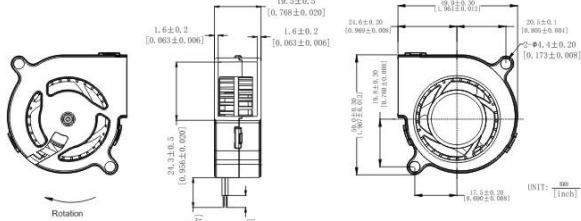

外框材质:环保防火PBT
 Frame:Thermoplastic PBT UL94-V0
 扇叶材质:环保防火PBT
 Impeller:Thermoplastic PBT UL94-V0
 轴承结构:双滚珠或长寿命含油结构
 Bearing system:2Ball or Long life sleeve
 单体重:26g
 Unit Weight:26g

可选的功能参照列表 (Available Functions)

1. 马达保护(Motor protection)

RP	SS	AS	CL
●	○	●	○


2. 信号输出(Signal output)

FG	RD	RD	LD
●	●	○	○

3. 调速方式(Speed control mode)

PWM	TP	VC	RC	CS
●	○	○	○	○

Fan Performance Curve



Part Number	Voltage(V)	Current(A)	Power(W)	Speed(RPM)	Air flow(Q)	Pressure(P)	Noise(dBA)
产品编号	电压范围	额定电流	功率	转速	(CFM) 风量	(mmAq)风压	(In H ₂ O) 噪音
RB5020x05D	5(3-6)	0.13	0.65	3000	2.91	0.08	32.87
RB5020x05L		0.2	1	4500	4.36	0.12	73.96
RB5020x05M		0.29	1.45	5200	5.04	0.14	10.07
RB5020x05H		0.28	1.4	6000	5.81	0.16	13.41
RB5020x12D	12(7-14)	0.06	0.72	3000	2.91	0.08	32.87
RB5020x12L		0.09	1.08	4500	4.36	0.12	73.96
RB5020x12M		0.13	1.56	5200	5.04	0.14	10.07
RB5020x12H		0.24	2.88	6000	5.81	0.16	13.41
RB5020x12VH	24(15-27)	0.27	3.24	6800	6.59	0.19	17.22
RB5020x12SH		0.32	3.84	7500	7.27	0.21	20.95
RB5020x24D		0.03	0.72	3000	2.91	0.08	3.35
RB5020x24L		0.04	0.96	4500	4.36	0.12	7.54
RB5020x24M	24(15-27)	0.06	1.44	5200	5.04	0.14	10.07
RB5020x24H		0.12	2.88	6000	5.81	0.16	13.41
RB5020x24VH		0.14	3.36	6800	6.59	0.19	17.22
RB5020x24SH		0.17	4.08	7500	7.27	0.21	20.95

★ 如果您需要的转速或电压或功能不在这份清单上，请与我们联系。
 If you want another rpm or voltage or functions which one is not in the list, please contact with our sales.

★ 提示1:功能的具体信息参照产品目录前页篇章。
 Notes1:The catalog have detail information in the front page for the functions.

★ 提示2:产品详细信息请参照承认书。
 Notes2:Product have a detail in the approval sheet.

★ 提示3:产品规格变更不另行通知。
 Notes3:Specifications are subject to change without notice.

★ 提示4:调速方式只能制作12V机型。
 Note4:Speed control mode only for 12V products.