


DC AXIAL FAN

120x120x25mm

RD1225 Series



DIMENSIONS DRAWING

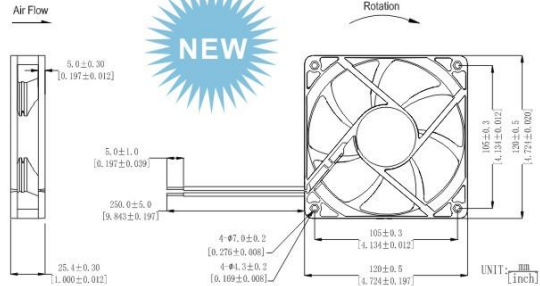

外框材质:环保防火PBT
 Frame:Thermoplastic PBT UL94-V0
 扇叶材质:环保防火PBT
 Impeller:Thermoplastic PBT UL94-V0
 轴承结构:双滚珠或长寿命含油结构
 Bearing system:2Ball or Long life sleeve
 单体风扇重量:125g
 Unit Weight:125g

可选的功能参照列表 (Available Functions)

1.马达保护(Motor protection)

RP	SS	AS	CL
●	●	●	●



2.信号输出(Signal output)

FG	RD	RD	LD
●	●	●	●

3.调速方式(Speed control mode)

PWM	TP	VC	RC	CS
●	●	●	●	●

Fan Performance Curve

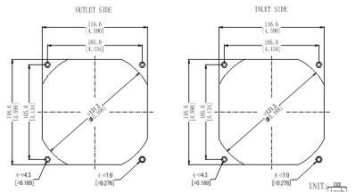

Part Number	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air flow (Q)	Pressure (P)	Noise (dBA)
产品编号	电压范围	额定电流	功率	转速	(CFM) 风量	m ³ /min (mmAq) 风压 (In H ₂ O)	噪音
RD1225x12D	12(7-14)	0.28	3.36	3000	85.59	2.42	43.6
RD1225x12L		0.40	4.80	3500	99.85	2.83	48.2
RD1225x12M		0.62	7.44	4000	114.12	3.23	50.6
RD1225x24D	24(15-27)	0.14	3.36	3000	85.59	2.42	43.6
RD1225x24L		0.20	4.80	3500	99.85	2.83	48.2
RD1225x24M		0.31	7.44	4000	114.12	3.23	50.6
RD1225x24H	48(35-57)	0.46	11.04	4500	128.38	3.63	53.6
RD1225x48L		0.10	4.80	3500	99.85	2.83	43.6
RD1225x48M		0.16	7.68	4000	114.12	3.23	48.2
RD1225x48H	48(35-57)	0.23	11.04	4500	128.38	3.63	50.6
RD1225x48VH		0.35	16.80	5000	142.64	4.04	53.6

- ★ 如果您需要的转速或电压或功能不在这份清单上, 请与我们联系。
If you want another rpm or voltage or functions which one is not in the list, please contact with our sales.
- ★ 提示1:功能的具体信息参照产品目录前页篇章。
Notes1:The catalog have detail information in the front page for the functions.
- ★ 提示2:产品详细信息请参照承认书。
Notes2:Product have a detail in the approval sheet.
- ★ 提示3:产品规格变更不另行通知。
Notes3:Specifications are subject to change without notice.