

DC AXIAL FAN

150x150x51mm


RS1551 Series





DIMENSIONS DRAWING



外框材质:铝合金
Frame:Aluminum
扇叶材质:环保防火PBT
Impeller:Thermoplastic PBT UL94-V0
轴承结构:双滚珠
Bearing system:2Ball
单体风扇重量:760g
Unit Weight:760g

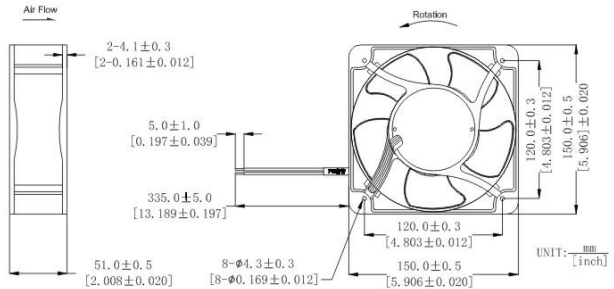

Fan Performance Curve



可选的功能参照列表 (Available Functions)

1. 马达保护 (Motor protection)

RP	SS	AS	CL
●	●	●	●

2. 信号输出 (Signal output)

FG	RD	RD	LD
●	●	●	●

3. 调速方式 (Speed control mode)

PWM	TP	VC	RC	CS
●	●	●	●	●

Part Number	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air flow (Q)		Pressure (P)		Noise (dBA)
产品编号	电压范围	额定电流	功率	转速	(CFM) 风量	m ³ /min	(mmAq) 风压	(In H ₂ O)	噪音
RS1551x12M	12(7-14)	1.16	13.92	3000	232.20	6.56	12.88	0.50	52.3
RS1551x12H		1.76	21.12	3500	269.65	7.62	17.38	0.68	56.6
RS1551x12VH		2.42	29.04	4000	307.11	8.68	22.54	0.88	60.5
RS1551x24M	24(15-28)	0.58	13.92	3000	232.20	6.56	12.88	0.50	52.3
RS1551x24H		0.88	21.12	3500	269.65	7.62	17.38	0.68	56.6
RS1551x24VH		1.21	29.04	4000	307.11	8.68	22.54	0.88	60.5
RS1551x24SH	48(35-58)	1.86	44.64	4500	344.56	9.74	28.37	1.11	62.3
RS1551x24UH		2.20	52.80	5000	382.01	10.80	34.88	1.37	66.8
RS1551x48M		0.29	13.92	3000	232.20	6.56	12.88	0.50	52.3
RS1551x48H	48(35-58)	0.44	21.12	3500	269.65	7.62	17.38	0.68	56.6
RS1551x48VH		0.60	28.80	4000	307.11	8.68	22.54	0.88	60.5
RS1551x48SH		0.93	44.64	4500	344.56	9.74	28.37	1.11	62.3
RS1551x48UH	48(35-58)	1.10	52.80	5000	382.01	10.80	34.88	1.37	66.8

★ 如果您需要的转速或电压或功能不在这份清单上, 请与我们联系。
If you want another rpm or voltage or functions which one is not in the list, please contact with our sales.

★ 提示1:功能的具体信息参照产品目录前页篇章。
Notes1:The catalog have detail information in the front page for the functions.

★ 提示2:产品详细信息请参照承认书。
Notes2:Product have a detail in the approval sheet.

★ 提示3:产品规格变更不另行通知。
Notes3:Specifications are subject to change without notice.