

DC AXIAL FAN


20x20x10mm

RS2010 Series





外框材质:环保防火PBT
 Frame:Thermoplastic PBT UL94-V0
 扇叶材质:环保防火PBT
 Impeller:Thermoplastic PBT UL94-V0
 轴承结构:双滚珠或长寿命含油结构
 Bearing system:2Ball or Long life sleeve
 单体风扇重量:6g
 Unit Weight:6g

DIMENSIONS DRAWING

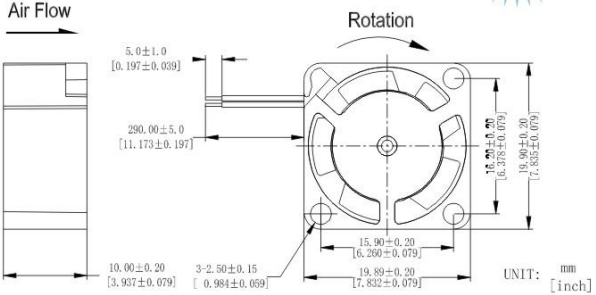

Fan Performance Curve

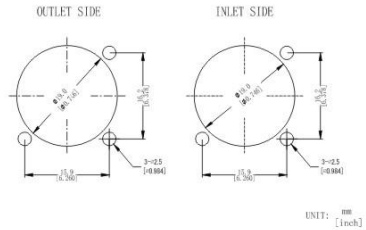

可选的功能参照列表 (Available Functions)

1.马达保护(Motor protection)

RP	SS	AS	CL
●	○	●	○

2.信号输出(Signal output)

FG	RD	RD	LD
●	●	○	○

3.调速方式(Speed control mode)

PWM	TP	VC	RC	CS
○	○	○	○	○

Part Number	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air flow (Q)	Pressure (P)	Noise (dBA)		
产品编号	电压范围	额定电流	功率	转速	(CFM)风量	m ³ /min	(mmAq)风压	(In H ₂ O)	噪音
RS2010x05L	5 (4-6)	0.07	0.35	10000	1.18	0.03	2.55	0.10	21.6
RS2010x05M		0.09	0.45	12000	1.42	0.04	3.67	0.14	23.0
RS2010x05H		0.16	0.80	14000	1.66	0.05	5.00	0.20	23.2

★ 如果您需要的转速或电压或功能不在这份清单上, 请与我们联系。
 If you want another rpm or voltage or functions which one is not in the list, please contact with our sales.

★ 提示1:功能的具体信息参照产品目录前页篇章。
 Notes1:The catalog have detail information in the front page for the functions.

★ 提示2:产品详细信息请参照承诺书。
 Notes2:Product have a detail in the approval sheet.

★ 提示3:产品规格变更不另行通知。
 Notes3:Specifications are subject to change without notice.