


DC AXIAL FAN

30x30x10mm

RS3010 Series



DIMENSIONS DRAWING

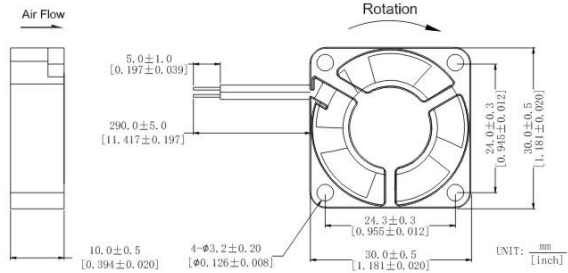

外框材质:环保防火PBT
Frame:Thermoplastic PBT UL94-V0
扇叶材质:环保防火PBT
Impeller:Thermoplastic PBT UL94-V0
轴承结构:双滚珠或长寿命含油结构
Bearing system:2Ball or Long life sleeve
单体风扇重量:8g
Unit Weight:8g

可选的功能参照列表 (Available Functions)

1. 马达保护(Motor protection)

RP	SS	AS	CL
●	○	●	○



2. 信号输出(Signal output)

FG	RD	RD	LD
●	●	○	○

3. 调速方式(Speed control mode)

PWM	TP	VC	RC	CS
○	○	○	○	○

Fan Performance Curve

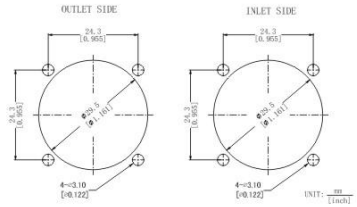

Part Number	Voltage(V)	Current(A)	Power(W)	Speed(RPM)	Air flow(Q)	Pressure(P)	Noise(dBA)
产品编号	电压范围	额定电流	功率	转速	(CFM) 风量	(mmAq)风压 (In H.O)	噪音
RS3010x05L	5(4~6)	0.07	0.35	6000	4.03	2.68	20.5
RS3010x05M		0.11	0.55	8000	5.36	4.73	25.2
RS3010x05H		0.13	0.65	10000	6.35	6.64	31.6
RS3010x12L	12(7~14)	0.05	0.60	6000	4.03	2.68	20.5
RS3010x12M		0.06	0.72	8000	5.36	4.73	25.2
RS3010x12H		0.09	1.08	10000	6.35	6.64	31.6
RS3010x12VH		0.13	1.56	11500	7.68	9.71	34.0

★ 如果您需要的转速或电压或功能不在这份清单上, 请与我们业务联系。
If you want another rpm or voltage or functions which one is not in the list, please contact with our sales.

★ 提示1:功能的具体信息参照产品目录前页篇章。
Notes1:The catalog have detail information in the front page for the functions.

★ 提示2:产品详细信息请参照承认书。
Notes2:Product have a detail in the approval sheet.

★ 提示3:产品规格变更不另行通知。
Notes3:Specifications are subject to change without notice.