


DC BLOWER

35x17mm

RB3517Series



DIMENSIONS DRAWING

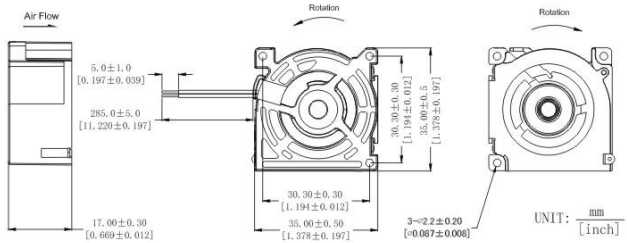

外框材质:环保防火PBT
 Frame:Thermoplastic PBT UL94-V0
 扇叶材质:环保防火PBT
 Impeller:Thermoplastic PBT UL94-V0
 轴承结构:双滚珠
 Bearing system:2Ball
 单体风扇重量:750g
 Unit Weight:750g

可选的功能参照列表 (Available Functions)

1.马达保护(Motor protection)


RP	SS	AS	CL
●	●	●	●

2.信号输出(Signal output)

FG	RD	RD	LD
●	●	●	●

3.调速方式(Speed control mode)

PWM	TP	VC	RC	CS
●	●	●	●	●



Part Number	Voltage(V)	Fre. (Hz)	Power(W)	Speed(RPM)	Air flow(Q)	Pressure(P)	Noise(dBA)		
产品编号	电压范围	额定电流	功率	转速	(CFM) 风量	m ³ /min	(Mmaq)风压 (In H ₂ O)	噪音	
RB3517x05D	5(4-6)	0.15	0.75	6000	1.73	0.05	3.53	0.14	33.5
RB3517x05L		0.24	1.20	6800	2.16	0.06	5.52	0.22	36.5
RB3517x05M		0.29	1.45	7400	3.02	0.09	10.82	0.43	37.9

- ★ 如果您需要的转速或电压或功能不在这份清单上，请与我们联系。
If you want another rpm or voltage or functions which one is not in the list, please contact with our sales.
- ★ 提示1:功能的具体信息参照产品目录前页篇章。
Notes1:The catalog have detail information in the front page for the functions.
- ★ 提示2:产品详细信息请参照承认书。
Notes2:Product have a detail in the approval sheet.
- ★ 提示3:产品规格变更不另行通知。
Notes3:Specifications are subject to change without notice.
- ★ 提示4:该款机型可制作相同转速的，可在AC110V和AC220V双电压下使用。
Note4:This model can be made in the same speed and used in AC110V, AC220V both.