

DC AXIAL FAN


60x60x10mm

RS6010 Series




外框材质:环保防火PBT
 Frame:Thermoplastic PBT UL94-V0
 扇叶材质:环保防火PBT
 Impeller:Thermoplastic PBT UL94-V0
 轴承结构:双滚珠或长寿命含油结构
 Bearing system:2Ball or Long life sleeve
 单体风扇重量:26g
 Unit Weight:26g

DIMENSIONS DRAWING

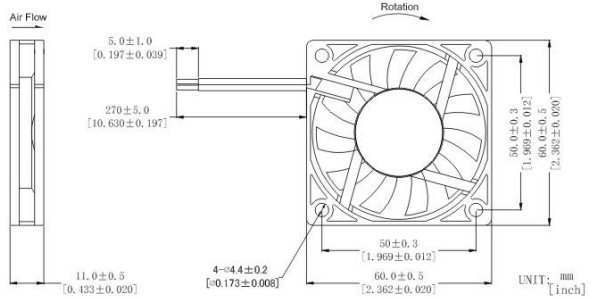

Fan Performance Curve

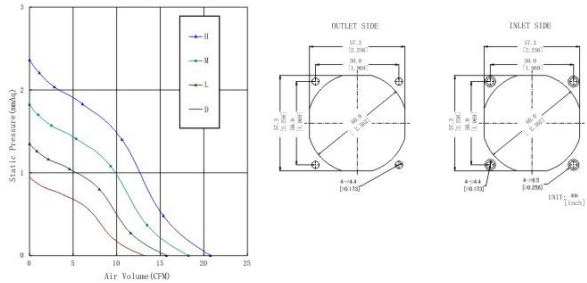

可选的功能参照列表
 (Available Functions)

1. 马达保护 (Motor protection)

RP	SS	AS	CL
●	○	●	○

2. 信号输出 (Signal output)

FG	RD	RD	LD
●	●	○	○

3. 调速方式 (Speed control mode)

PWM	TP	VC	RC	CS
●	○	○	○	○

Part Number	Voltage(V)	Current(A)	Power(W)	Speed(RPM)	Air flow(Q)	Pressure(P)	Noise(dBA)		
产品编号	电压范围	额定电流	功率	转速	(CFM) 风量	(mmAq)风压 (In H.O)	噪音		
RS6010x05L	5(4~6)	0.15	0.75	2500	13.17	0.37	0.95	0.04	21.6
RS6010x05M		0.27	1.35	3000	15.70	0.44	1.35	0.05	24.0
RS6010X05H		0.34	1.7	3500	18.23	0.52	1.82	0.07	26.7
RS6010x12L	12(7~14)	0.06	0.72	2500	13.17	0.37	0.95	0.04	21.6
RS6010x12M		0.11	1.32	3000	15.70	0.44	1.35	0.05	24.0
RS6010x12H		0.14	1.68	3500	18.23	0.52	1.82	0.07	26.7
RS6010x12VH		0.18	2.16	4000	20.76	0.59	2.36	0.09	29.2
RS6010x24M	24(15~27)	0.55	13.2	3000	15.31	0.43	1.55	0.06	24.0
RS6010x24H		0.07	1.68	3500	17.80	0.50	2.10	0.08	26.7
RS6010x24VH		0.09	2.16	4000	20.76	0.59	2.36	0.09	29.2

★ 如果您需要的转速或电压或功能不在这份清单上，请与我们联系。
 If you want another rpm or voltage or functions which one is not in the list, please contact with our sales.

★ 提示1:功能的具体信息参照产品目录前页篇章。
 Notes1:The catalog have detail information in the front page for the functions.

★ 提示2:产品详细信息请参照承诺书。
 Notes2:Product have a detail in the approval sheet.

★ 提示3:产品规格变更不另行通知。
 Notes3:Specifications are subject to change without notice.

★ 提示4:调速方式只能制作12V机型。
 Note4:Speed control mode only for 12V products.