


DC AXIAL FAN

60x60x15mm

RS6015 Series



DIMENSIONS DRAWING

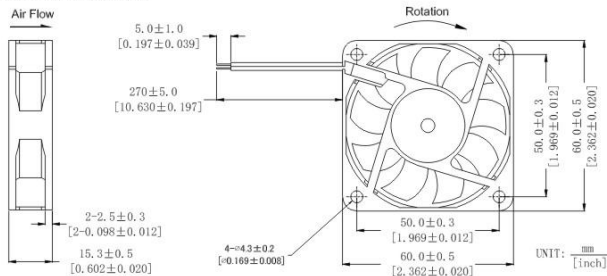

外框材质:环保防火PBT
Frame:Thermoplastic PBT UL94-V0
扇叶材质:环保防火PBT
Impeller:Thermoplastic PBT UL94-V0
轴承结构:双滚珠或长寿命含油结构
Bearing system:2Ball or Long life sleeve
单体风扇重量:28g
Unit Weight:28g

可选的功能参照列表 (Available Functions)

1.马达保护(Motor protection)




RP	SS	AS	CL
☐	☐	☐	☐

2.信号输出(Signal output)

FG	RD	RD	LD
☐	☐	☐	☐

3.调速方式(Speed control mode)

PWM	TP	VC	RC	CS
☐	☐	☐	☐	☐



Part Number	Voltage(V)	Current(A)	Power(W)	Speed(RPM)	Air flow(Q)		Pressure(P)		Noise(dBA)
产品编号	电压范围	额定电流	功率	转速	(CFM) 风量	m³/min	(mmAq)风压	(In H₂O)	噪音
RS6015x05D	5(4~6)	0.29	1.45	3000	13.01	0.37	1.86	0.07	29.2
RS6015x05L		0.36	1.8	3500	15.18	0.43	2.53	0.10	30.0
RS6015x05M		0.46	2.3	4000	17.35	0.49	3.31	0.13	31.5
RS6015x12D		0.12	1.44	3000	13.01	0.37	1.86	0.07	29.2
RS6015x12L	12(7~14)	0.15	1.8	3500	15.18	0.43	2.53	0.10	30.0
RS6015x12M		0.19	2.28	4000	17.35	0.49	3.31	0.13	31.5
RS6015x12H		0.21	2.52	4500	19.52	0.55	4.18	0.16	34.5
RS6015x12VH		0.23	2.76	5000	21.69	0.61	5.17	0.20	35.6
RS6015x12SH	24(15~27)	0.28	3.36	5500	23.86	0.68	6.25	0.25	38.0
RS6015x24L		0.075	1.8	3500	15.18	0.43	2.53	0.10	30.0
RS6015x24M		0.1	2.4	4000	17.35	0.49	3.31	0.13	31.5
RS6015x24H		0.11	2.64	4500	19.52	0.55	4.18	0.16	34.5
RS6015x24VH		0.12	2.88	5000	21.69	0.61	5.17	0.20	35.6
RS6015x24SH		0.14	3.36	5500	23.86	0.68	6.25	0.25	38.0

★ 如果您需要的转速或电压或功能不在这份清单上, 请与我们联系。
If you want another rpm or voltage or functions which one is not in the list, please contact with our sales.

★ 提示1:功能的具体信息参照产品目录前页篇章。
Notes1:The catalog have detail information in the front page for the functions.

★ 提示2:产品详细信息请参照承认书。
Notes2:Product have a detail in the approval sheet.

★ 提示3:产品规格变更不另行通知。
Notes3:Specifications are subject to change without notice.

★ 提示4:调速方式只能制作12V机型。
Notes4:Speed control mode only for 12V products.