


DC AXIAL FAN

70x70x25mm

RS7025 Series



DIMENSIONS DRAWING

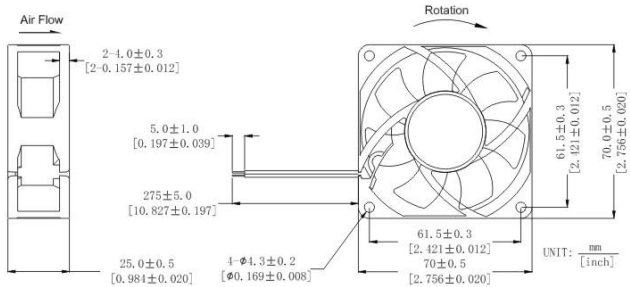

外框材质:环保防火PBT
 Frame:Thermoplastic PBT UL94-V0
 扇叶材质:环保防火PBT
 Impeller:Thermoplastic PBT UL94-V0
 轴承结构:双滚珠或长寿命含油结构
 Bearing system:2Ball or Long life sleeve
 单体风扇重量:78g
 Unit Weight:78g

可选的功能参照列表 (Available Functions)

1.马达保护(Motor protection)



RP	SS	AS	CL
●	●	●	●

2.信号输出(Signal output)

FG	RD	RD	LD
●	●	●	●

3.调速方式(Speed control mode)

PWM	TP	VC	RC	CS
●	●	●	●	●



Part Number	Voltage(V)	Current(A)	Power(W)	Speed(RPM)	Air flow(Q)	Pressure(P)	Noise(dBA)
产品编号	电压范围	额定电流	功率	转速	(CFM) 风量	m ³ /min (mmAq)风压 (In H ₂ O)	噪音
RS7025x12D	12(7~14)	0.10	1.2	2500	26.00	0.74	27.4
RS7025x12L		0.28	3.36	3500	36.00	1.02	35.5
RS7025x12M		0.31	3.72	4000	41.00	1.16	39.0
RS7025x12H		0.36	4.32	4500	46.00	1.30	41.6
RS7025x24L	24(15~27)	0.14	3.36	3500	36.00	1.02	35.5
RS7025x24M		0.16	3.84	4000	41.00	1.16	39.0
RS7025x24H		0.18	4.32	4500	46.00	1.30	41.6
RS7025x24VH		0.20	4.8	5000	51.00	1.44	44.6

★ 如果您需要的转速或电压或功能不在这份清单上, 请与我们联系。
 If you want another rpm or voltage or functions which one is not in the list, please contact with our sales.

★ 提示1:功能的具体信息参照产品目录前页篇章。
 Notes1:The catalog have detail information in the front page for the functions.

★ 提示2:产品详细信息请参照承认书。
 Notes2:Product have a detail in the approval sheet.

★ 提示3:产品规格变更不另行通知。
 Notes3:Specifications are subject to change without notice.