

40 mm sq.

San Ace 40



General Specifications

- Material Frame: Plastics (Flammability: UL94V-0),
Impeller: Plastics (Flammability: UL94V-0)
- Expected Life Refer to specifications (L10:Survival rate:90% at 60°C ,
rated voltage, and continuously run in a free air state)
- Lead Wire Inlet ⊕red ⊖black (Sensor) yellow (Control) brown
Outlet ⊕orange ⊖gray (Sensor) purple (Control) white
- Storage Temperature -30°C to +70°C (Non-condensing)

40×40×56mm (Mass : 90g) **9CRD type**


Specifications

The following nos. **have PWM controls and pulse sensors.**

Model No.	Rated Voltage [V]	Operating Voltage Range [V]	PWM duty cycle* [%]	Rated Current [A]	Rated Input [W]	Rated Speed [min ⁻¹]	Max. Airflow [m ³ /min] [CFM]	Max. Static Pressure [Pa] [inchH ₂ O]	SPL [dB(A)]	Operating Temperature [°C]	Expected Life [h]
9CRD0412P5J03	12	10.8 to 13.2	100	1.15	13.8	19,000 12,600	0.87 30.72	630 2.53	61	-20 to +70	40,000/60°C
			0	0.12	1.44	3,700 2,500	0.15 5.30	25 0.10	22		
9CRD0412P5G03			100	0.90	10.8	16,700 11,250	0.77 27.19	500 2.01	58		
			0	0.10	1.2	3,350 2,250	0.13 4.59	21 0.08	21		
9CRD0412P5H03			100	0.60	7.2	15,000 10,000	0.70 24.72	410 1.65	56		
			0	0.09	1.08	3,000 2,000	0.12 4.24	16 0.06	20		
9CRD0412P5M03	100	0.52	6.24	14,000 9,300	0.65 22.95	360 1.45	54				
	0	0.07	0.84	2,000 1,300	0.07 2.47	7 0.03	15				


*PWM Frequency : 25kHz

Dimensions (unit: mm)

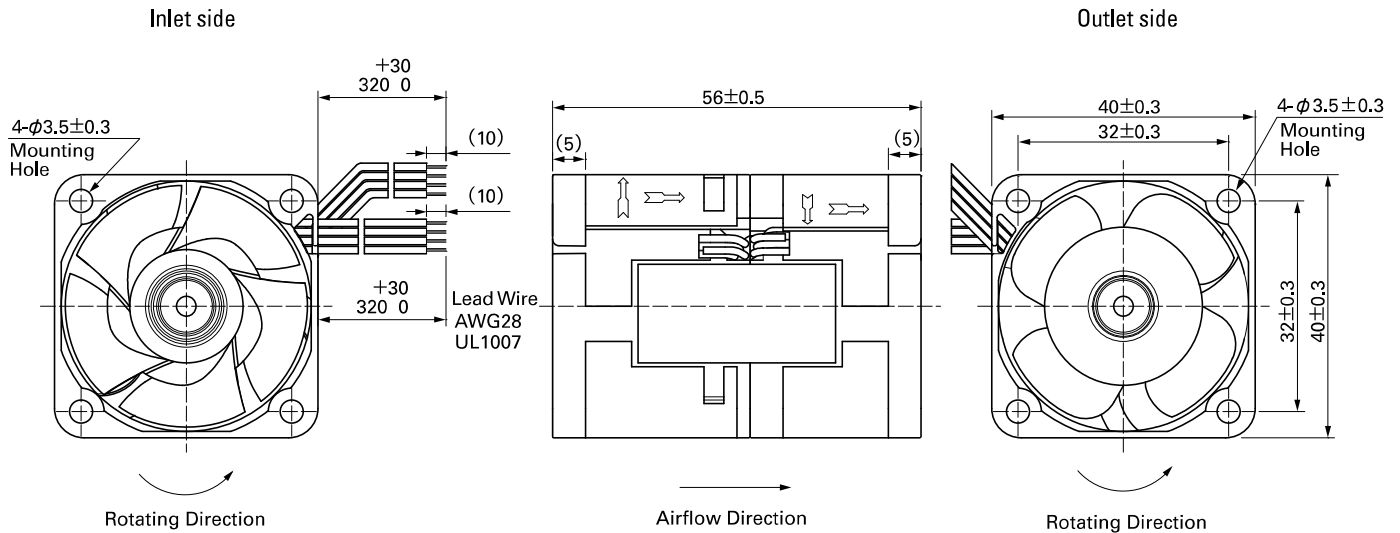

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

Inlet side, Outlet side

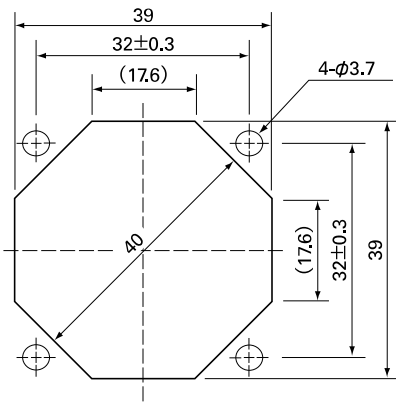


Options (unit: mm)

Finger Guards

Model : 109-059 Surface treatment : Nickel-chrome plating (silver) Color
 : 109-059H : Cation electropainting (black)

Inlet side, Outlet side

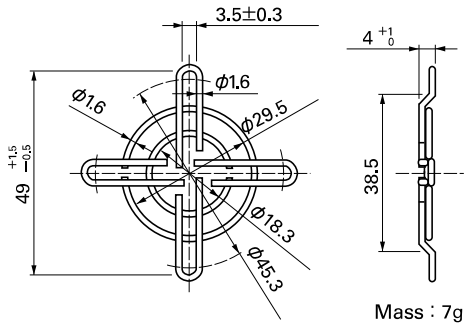

Mass : 7g


40 mm sq.

San Ace 40


40×40×56mm [Mass : 90g]

Airflow - Static Pressure Characteristics


PWM Duty Cycle

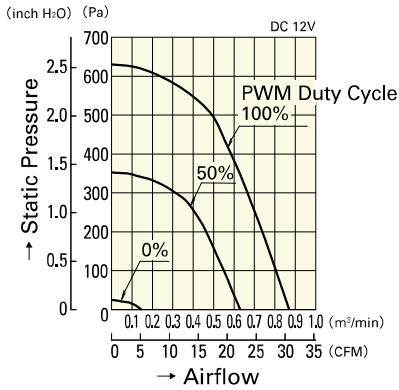

9CRD0412P5J03

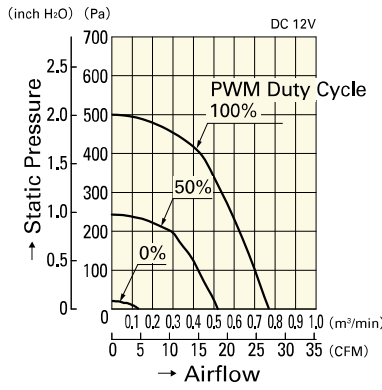


9CRD0412P5G03

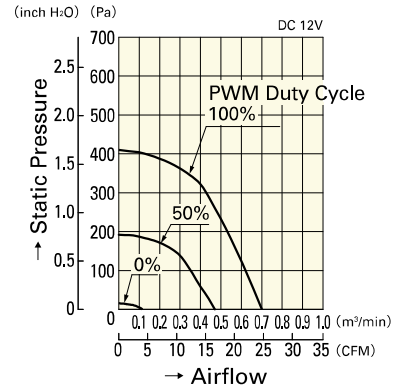


9CRD0412P5H03


Operating Voltage Range

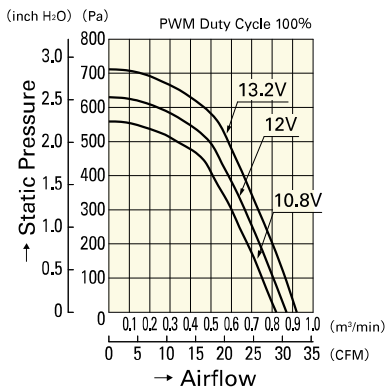

9CRD0412P5J03

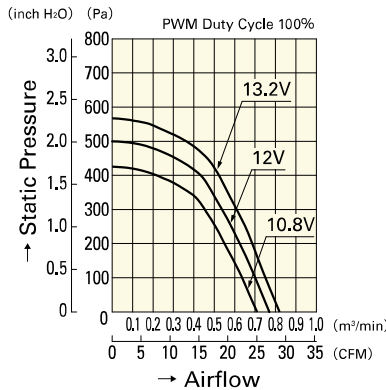


9CRD0412P5G03

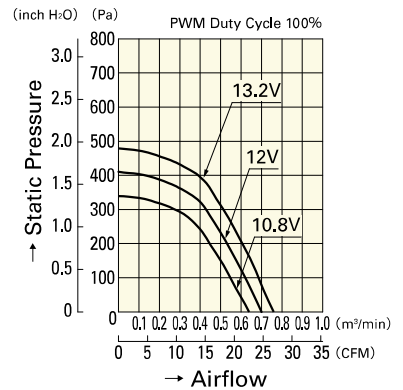


9CRD0412P5H03


PWM Duty - Speed Characteristics Example

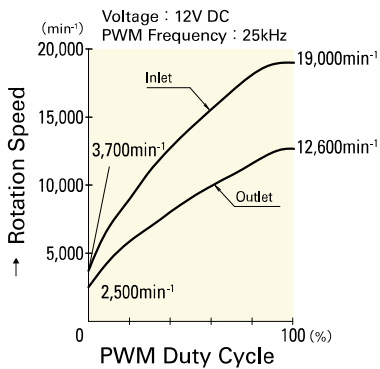


9CRD0412P5J03

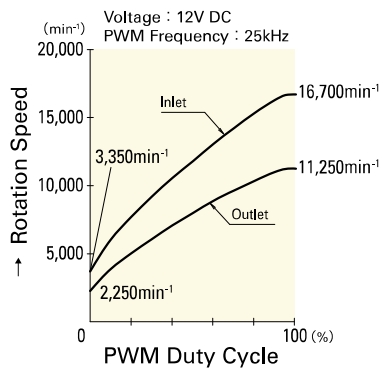


9CRD0412P5G03

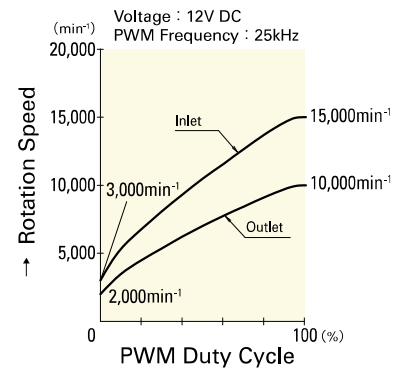


9CRD0412P5H03

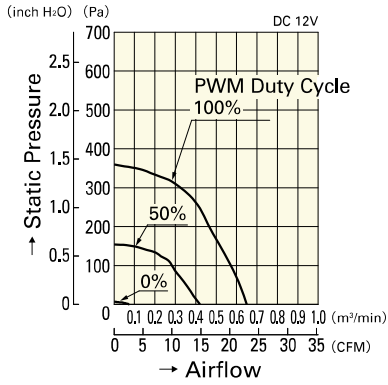

9CRD0412P5M03

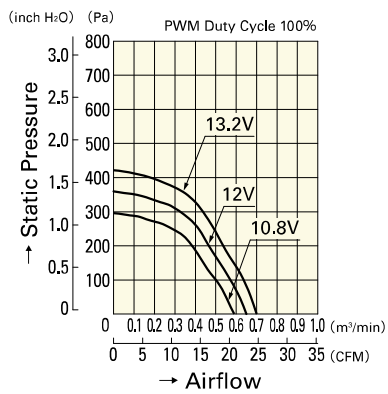

9CRD0412P5M03

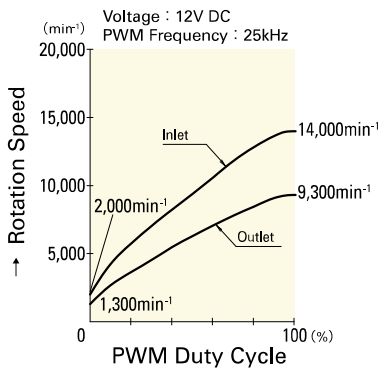

9CRD0412P5M03